



OX
WORLDWIDE

RENTAL



OUR COMPANY

A BRIEF INTRODUCTION

We created our company in 1992 and since then, we have been specializing in lifting and maintenance of loads, working for the industrial and naval sectors.

OX WORLDWIDE is a division born from this previous experience that manufactures and commercializes very specific products of maintenance. We introduce our OX TROLLEYS (self-propelled trolleys), our OX CUSHIONS (air cushions system), and OX-ATTACK (dragging systems).

OUR COMPANY.

The products and the advising we supply are our standards of quality. We are provided of a qualified staff, proper facilities and we can send you any kind of information about the products you demand: sketches, detail layouts, certificates, instruction manuals, etc. Without compromise, consult us and we will advise you.

CERTIFICATE OF APPROVAL ISO 9001.

Our department of quality is guaranteed by periodic inspections and approval certificates by Lloyd Register Quality Assurance.



Emilio Blasco
Management.



Jordi Ortiz
Technical Office.



Miguel Ruiz
Sales Director.



Ruben Blasco
Export Area 1.
(Europe, Africa and Asia).



Carlos Viegas
Export Area 2.
(Central Europe).



David García
Export Area 3.
(Spain).



Eduard Sans
Export Area 4.
(USA, Canada and Oceania).



Daniel Navarro
Export Area 5.
(South America).



Manel Amat
Manufacture.



M^a Angels Batlle
Accounting.



Carme Canalda
Administration.



INDEX

INTRODUCTION	p.4-5
TRANSPORT OF MACHINERY	p.6-9
GANTRIES	p.11-13
LIFTING OF MACHINERY	p.14-16
LIFTING OF PERSONNEL	p.17

RENTAL OF TRANSPORT, MAINTENANCE AND LIFTING MATERIALS.


In order to improve our relation we offer you the rental service for those products that may fit your needs.


PRICES, PERIODS AND DELIVERY.

Consult us, we have the best prices. High performance at a low cost. Most products are immediately delivered from our facilities.

For those near our facilities, the product will be on its way two hours after your call, once paid the warranty deposit. Nevertheless you can also come by and take the materials.

All Rental products have been tested and labelled. Its certification and instruction manual is also delivered.

 (+0034) 902 181 777

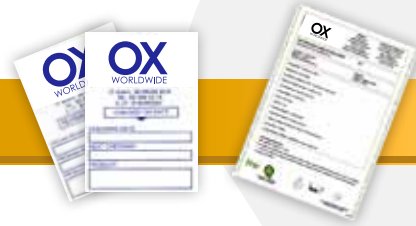

TESTING AND INSPECTIONS.

We perform dynamic testing with the maximum load or 1,5 times its SWL. Always based on your needs.

All checked products will be numbered as OTXXXX with type and serie and registered in our database. We attach a report that estimates the next date for checking.



WARRANTY IMPORTANT POINTS

- 1° Based on ORDER 1215/1997, dated on 18th July, about the minimum safety and health conditions for the use of work equipment by workers on their activity (BOE nº188 on 07-08-1997), CFB specifies an annual checking of any equipment in order to maintain it in proper conditions of safety and performance.
- 2° Qualified staff.
- 3° Quality products.
- 4° Spare and original parts, wide stock.
- 5° Vertical 25 tons testing bench.
- 6° 3 warehouse vehicles.
- 7° ISO 9001 quality certification.
- 8° CE conformity certification.
- 9° Labour risks prevention certification.
- 10° Associations we belong to: AWRF.

RENTAL

We offer a wide range of products, a full equipment that goes from light equipment (few kgs) to hundreds of tone, available for its immediate rental, we can deliver it anywhere.

Advantatges:

- Not immobilized
- Transparency of costs.
- Fiscal advantatges.
- Management flexibility.
- Low costs.

TAS (technical assistance service)

Our staff can repair your equipment anywhere: in your company, at the building site or in our facilities.

SALE

All products related are available for its sale as a "new" product.

CONSTRUCTION

OX Worldwide can study, design and manufacture a proper solution for your lifting and maintenance matters.

CHECKING SERVICE.

We perform checking services in all range of products, in your facilities or in our warehouses.

All products will be numbered, checked and labelled in accordance with norms.

TESTING

We can perform load static testing for all kind of materials.

SIGNALS



HELMET IS MANDATORY.



TRANSPORTATION WITH CAR



GLOVES ARE MANDATORY.



LASHING.



BOOTS ARE MANDATORY.



LIFTING.



TRANSPORTATION WITH VAN.




TRANSFER.




ROTATIVE TROLLEYS

TRANSPORT OF MACHINERY


For any kind of load movement in complicated workspaces.
 High load capacity with reduced weight.
 Bearings and 360° spinning wheels.
 They can be manufactured with coupling for hitch bars.



OX-3T

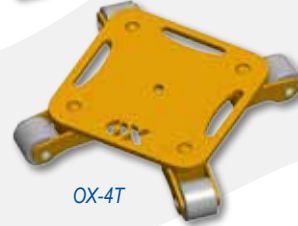

OX-4T

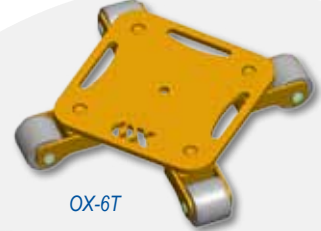

OX-6T

Code	Type	SWL	Height (mm)	Weight (kg)
RT858000001	ROTATIVE TROLLEYS MOD. OX-3T	3 tons	110	14
RT858000002	ROTATIVE TROLLEYS MOD. OX-4T	4 tons	120	20
RT858000003	ROTATIVE TROLLEYS MOD. OX-6T	6 tons	120	25



SELF-PROPELLED TROLLEYS

TRANSPORT OF MACHINERY

OX-Trolleys are compact and self-propelled machines built for transporting loads from 30 to 200 tons with the possibility of performing 360° turns.

THERE ARE 2 MODALITIES:

OX-ST : Three-phase supply trolley.

OX-TMC: Three-phase supply and load lifting cilinder trolley.

OX-CT/CTS: Rear trolleys.

OX-MB: Battery module for OX-TMC trolleys.

OX FEATURES

- Self propelled trolleys (turn 360°).
- Power: 380 Vac III 50 Hz. Optional: different tensions and frequencies.
- Power chain in every wheel.
- 18 polyamide wheels.
- Motorized trolley weight: kg.
- Supplied with a remote control and an auxiliar corded handset.
- Rotating load main platform.
- Speed: from 3 to 5 mts/min.
- Trolley warranty: 12 months.
- Wheels warranty: 6 months.

OX-CTS FEATURES

- Pair of rear trolleys + bars.
- 6 wheels.

Reference code	Type	Capacity (Tons)	
RT857OXST020	OX-ST-020	10	20
RT857OXCTS020	OX-CTS-020	10	
RT857OXST030	OX-ST-030	15	30
RT857OXCTS030	OX-CTS-030	15	
RT857OXTMC030	OX-TMC-030	15	30
RT857OXCT030	OX-CT-030	15	
RT857OXMB030	OX-MB-030	-	60
RT857OXST060	OX-ST-060	30	
RT857OXCTS060	OX-CTS-060	30	60
RT857OXTMC060	OX-TMC-060	30	
RT857OXCT060	OX-CT-060	30	60
RT857OXMB060	OX-MB-060	-	
RT857OXST100	OX-ST-100	50	100
RT857OXCTS100	OX-CTS-100	50	
RT857OXTMC100	OX-TMC-100	50	100
RT857OXCT100	OX-CT-100	50	
RT857OXMB100	OX-MB-100	-	150
RT857OXST150	OX-ST-150	75	
RT857OXCTS150	OX-CTS-150	75	150
RT857OXTMC150	OX-TMC-150	75	
RT857OXCT150	OX-CT-150	75	150
RT857OXMB150	OX-MB-150	-	
RT857OXST200	OX-ST-200	100	200
RT857OXCTS200	OX-CTS-200	100	
RT857OXTMC200	OX-TMC-200	100	200
RT857OXCT200	OX-CT-200	100	
RT857OXMB200	OX-MB-200	-	

FROM 20 TO 200 TONS

OX-CTS



OX-ST



AIR CUSHIONS

TRANSPORT OF MACHINERY

TS Systems are a compressed air transport system that consist of 4 air cushions assembled on supporting sheets that include a control table and all air hoses needed.

Due to its extremely low friction this system is able to transport and place loads superior to 100 tons with ease. You can perform every horizontal movement you desire, loads are easy to handle, spin and place in the right position.

ADVANTATGES.

- Compact air transport system.
- Transport and flexible horizontal placement.
- Low height system construction.
- Directly apliable.
- Relatively low investment.

Suitable for transporting containers, audience chairs platforms, bus stops, for moving paper reels, iron sheets, computers and all kind of machinery. Your maintenance department will work faster and better when you use air transport systems.

FROM 4.000 TO 240.000 KGS



Code	Type	SWL (kg)	Dimensions L X B X H (mm)	Air consumption in NL/min.	Air cushion elements
RT881TS4B30N	OX-TS-4-B30N	4000	300 x 300 x 22	1200-1400	4 x B30N
RT881TS8B40N	OX-TS-8-B40N	8000	400 x 400 x 24	1600-2800	4 x B40N
RT881TS12B50N	OX-TS-12-B50N	10000	500 x 500 x 27	2000-3200	4 x B50N
RT881TS18B50N	OX-TS-18-B50N	18000	500 x 500 x 27	3000-4800	6 x B50N
RT881TS24B70N	OX-TS-24-B70N	24000	700 x 700 x 27	2400-4000	4 x B70N
RT881TS36B70N	OX-TS-36-B70N	36000	700 x 700 x 27	3600-6000	6 x B70N
RT881TS40B90N	OX-TS-40-B90N	40000	900 x 900 x 69	3200-5200	4 x B90N
RT881TS60B90N	OX-TS-60-B90N	60000	900 x 900 x 69	4800-7800	6 x B90N
RT881TS160B125HD	OX-TS-160-B125HD	160000	1250 x 1250 x 69	7200-11200	4 x B125HD
RT881TS240B125HD	OX-TS-240-B125HD	240000	1250 x 1250 x 69	10800-16800	6 x B125HD

NEW!

DEMO BOX:

We have also available a TS1-A25N model system of 1200 kg capacity with 4 cushions of 300 kg per unit. It includes a regulator with 4 outputs, hoses and PVC sheets.



LIFTING BEAMS

LIFTING OF MACHINERY




ADJUSTABLE LIFTING BEAM

We have strong lifting beams with one or two top anchorage points + leg chain available. Shackles can be changed from 1 to 4 meters.

The standard load of these lifting beams is from 5 to 10 tons.

We can manufacture any kind of lifting beam: Crossed, "C" type hooks, etc... and for any load. Do not doubt and consult us.

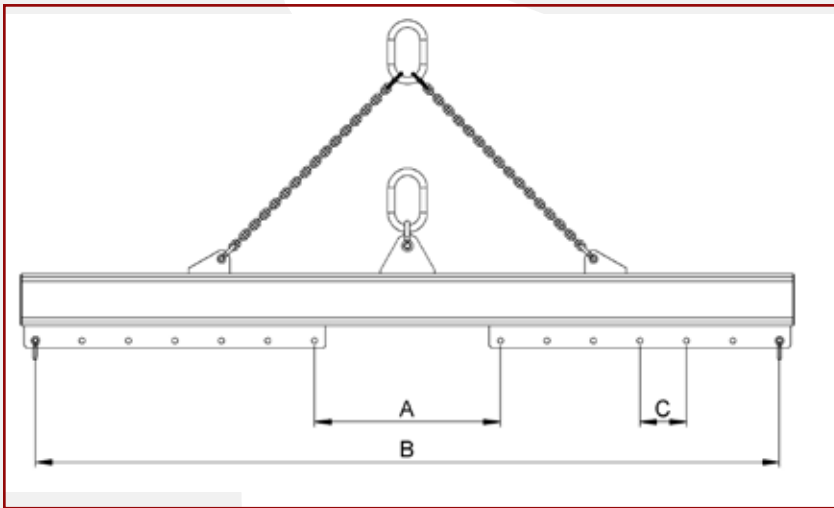


Load	A	B	C
5t	4.000	1.000	250
10t	4.000	1.000	250



SPREADER BEAM.

Modular system for lifting big loads "OX Spreader". For other measures do not doubt and consult us.

We can manufacture from 3 to 3000 tons.

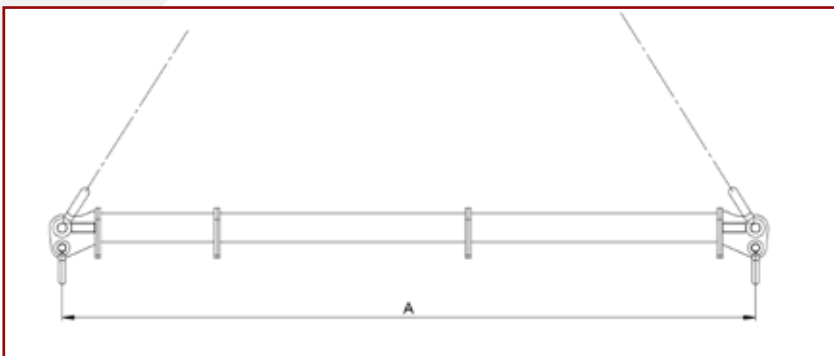

SWL	Max. length (m)	Min. Length (m)
70 t.	7	2



ACCESS SAFETY PLATFORMS

LIFTING OF PERSONNEL

MB-D Type



Access safety platforms ensures safety for repairs and maintenance work

- Number of persons permitted: 2
- Fork sleeves with safety mechanism to prevent slipping
- With galvanized tool deposit

Finish

RAL 2000 RAL 5012 Hot-dip galvanized

MB-D/L Type



Types available

Type MB-D

- Approved by the German "TÜV", in compliance with the UVV (German accident prevention regulations)
- Picked up lengthwise by a fork-lift truck

Type MB-D/L

- Approved by the German "TÜV", in compliance with the UVV (German accident prevention regulations)
- Picked up crosswise by a fork-lift truck

Type MB-B

- With automatic door latch
- Picked up lengthwise by a fork-lift truck

Type MB-B/L

- With automatic door latch
- Picked up crosswise by a fork-lift truck

Type MB-F

- Approved by the German "TÜV", in compliance with the UVV (German accident prevention regulations)
- Folding construction
- Just a couple of hand movements and the platform is ready for use
- Picked up lengthwise by a fork-lift truck

Type MB-K-IV

- Approved by the German "TÜV", in compliance with the UVV (German accident prevention regulations)
- According to DIN EN 14502-1
- Load capacity 300 kg
- Stirrups, 135 mm ground leeway
- With galvanized roof
- Standard includes a 4-leg chain
- Pick up by crane

MB-B Type



MB-K-IV Type



Accessory

- 2 swivel + 2 fixed polyamide castors Ø 180 mm, one swivel castor with brake - construction height 220 mm (not Type MB-K-IV)

Type	Dimensions in mm (l x w x h)	Floor area (mm)	Total permitted weight (kg)	Weight painted (kg)	Fork sleeve inside dimensions in mm		
					A	B	C
RT574001MBD	1115 x 1200 x 1890	800 x 1200	300	120	600	200	80
RT574001MBDL	1290 x 800 x 1890	1200 x 800	300	120	160	200	80
RT574001MBB	1115 x 1200 x 1890	800 x 1200	300	120	600	200	80
RT574001MBBL	1290 x 800 x 1890	1200 x 800	300	120	160	200	80
RT574001MBF	1090 x 1200 x 1890	1000 x 1200	300	120	600	200	80
RT574001MBK	800 x 1200 x 2300	800 x 1200	470	170	-	-	-

MB-F galvanized type





OX

WORLDWIDE

www.oxworldwide.com

C/Mare de Déu de Nuria, 4
08830 Sant Boi de Llobregat.
Tel. (+0034) 902 181 777
info@oxworldwide.com
www.oxworldwide.com

